


NetSupport Notify Linux Agent 2.01 Read Me

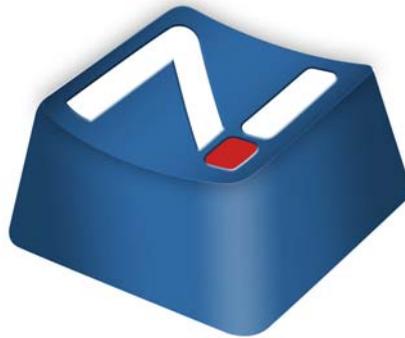

Program & Documentation Copyright (c) 2009
NetSupport Ltd.
All rights reserved.

Contents

Supported Distributions	3
System Requirements.....	3
Configuration	5
Restarting The Agent.....	5
The Log File	5
Contacting NetSupport	6

Supported Distributions

The NetSupport Notify Agent supports, at the time of release, Red Hat Enterprise, Fedora, SuSE, Debian and Ubuntu.

- Red Hat Enterprise 5
- Fedora 10 and later
- SuSE 11 and later
- Debian 4 and later
- Ubuntu 8.04 and later

System Requirements

The Notify Agent requires gtkmm 2.4 to be installed for the Notification Agent. The installer will prompt to download the library during installation if it is required. For this to be successful a connection to the Internet is required.

To display messages in the language selected during installation a system locale matching that language must have been installed. For example, to display Spanish messages, a Spanish system locale must have been installed (e.g. es_ES or es_MX).


When installing the Notify Agent, localised messages in the supported languages can only be displayed if the gettext package is installed. If the gettext package is not installed, English is used during the installation.

Installation

To install the Linux Notification Agent, you need to extract the ***nsn_installer.tar.gz*** to a folder (i.e /home/user/Desktop/nsn_installer) and then run the ***install*** file as a root user.

You will need to configure the information that the agent uses to connect to the Notification Server. (Refer to the next section for further information.)

If you place a pre-configured config.dat file (case sensitive) next to the installer file ("install script" within nsn_installer folder) before running the install script, this will copy that config.dat file into position for you. This can be used to simplify installation and configuration, especially on more than one machine.

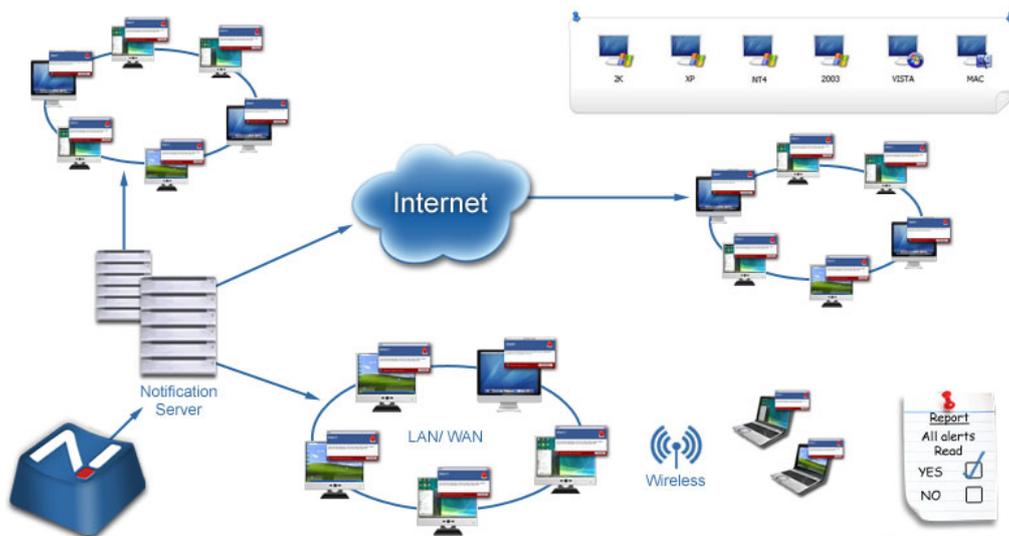

Configuration

The file `/usr/nsn/daemon/config.dat` contains the Notification Server details used by the agent.

This file can be edited using the Configurator application. The Configurator can be found at: `/usr/nsn/configurator/configurator`

If you modify this file using the configurator application, the Notification daemon will be automatically restarted once changes have been applied. If you replace this file by hand you will need to restart the Notification daemon from the terminal using the following command `/etc/init.d/notifydaemon restart` (Needs to be root).

Restarting The Agent

The agent starts automatically when the operating system starts up, but if you change the configuration file you will need to restart the daemon.

The Log File

Diagnostic information and records are stored in the log file. This can be found at:

`/var/log/notifydaemon.log`

To open this file either use `gedit` or `emacs` or the "cat" command in the Terminal command line

Contacting NetSupport

If you have any comments regarding the design, installation, configuration, or operation of this package please contact us.

UK & International

www.netsupportsoftware.com

Technical Support: support@netsupportsoftware.com

Sales (UK & Eire): sales@netsupportsoftware.co.uk

Sales (International): sales@netsupportsoftware.com

North America

www.netsupport-inc.com

Technical Support: support@netsupport-inc.com

Sales: sales@netsupport-inc.com

Germany, Austria and Switzerland

www.pci-software.de

Technical Support: support@pci-software.de

Sales: sales@pci-software.de

Japan

www.netsupportjapan.com

Technical Support: support@netsupportsoftware.com

Sales: sales@netsupportjapan.com